




COMBi-CSS

PIATTAFORMA DI CARICO PER CONTAINER

Con il dispositivo per il caricamento container Combi-CSS è possibile caricare un intero container in meno di 6 minuti. Progettato per il carico veloce, può gestire carichi fino a 30 Ton e container da 20', 30' e 40'.



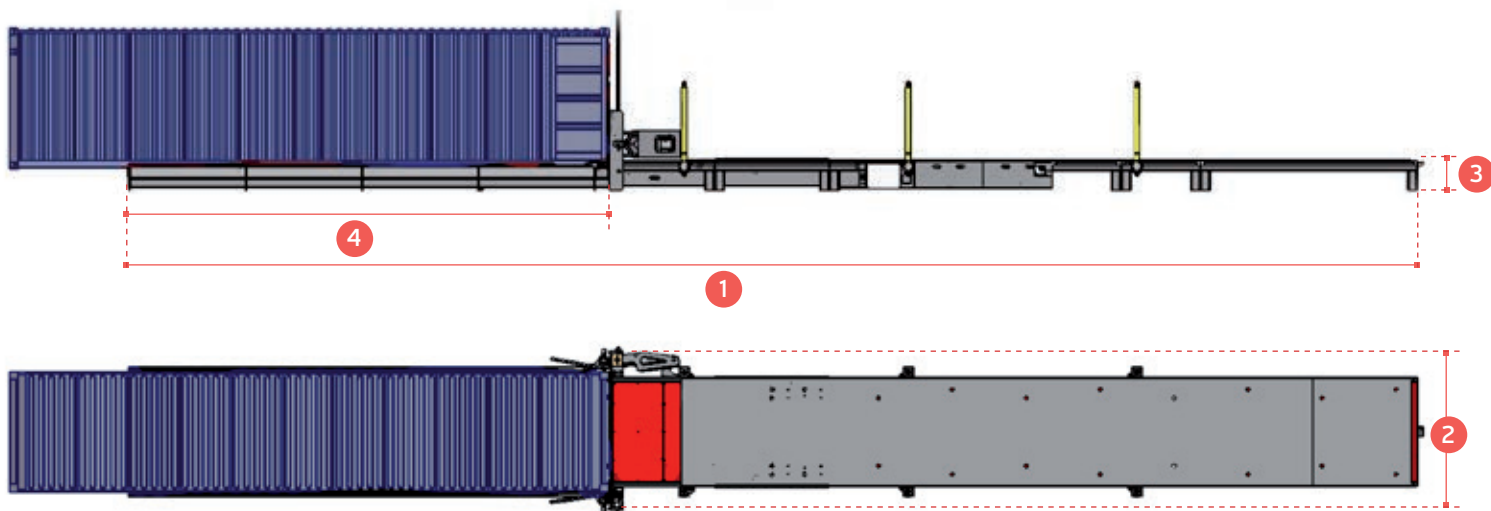

Caratteristiche:

- Barriera idraulica
- Monitor operatore
- Rilevamento lunghezza container
- Dispositivo di sollevamento in optional

Brevetto:

PCT/EP2019/059638
Pulling Transfer System

Ref.	Descrizione	Combi-CSS
1	Lunghezza totale	16.560 mm
2	Larghezza	3.250 mm
3	Altezza	626 mm
4	Lunghezza telaio container	9.780 mm
•	Portata	30.000 Kg
•	Motore	Trifase 37 kW
•	Corsa idraulica	13.600 mm
•	Dimensioni container	20'/30'/40'
•	Materiale slitta di carico	Hardox 500
•	Tempo di carica	40' in 6 min



COMBILIFT HAS A POLICY OF CONTINUOUS PRODUCT DEVELOPMENT AND RESERVES THE RIGHT TO ALTER SPECIFICATIONS WITHOUT PRIOR NOTICE. SPECIFICATIONS AND/OR DIMENSIONS MAY VARY FROM THOSE ILLUSTRATED IN SOME COUNTRIES.



Euro Assistance Group S.R.L.

Via Staffette Partigiane, 6
42019 Arceto di Scandiano (RE) ITALY
tel 0522 98 03 55 | email info@eaweb.it

www.eaweb.it



importatore unico per l'Italia

COMBILIFT
LIFTING INNOVATION